


| SYMBOL | MILLIMETER | | |
|----------|------------|-------|-------|
| | MIN | NOM | MAX |
| A | - | - | 2.64 |
| A1 | 0.10 | 0.15 | 0.20 |
| A2 | 2.24 | 2.34 | 2.44 |
| b | 0.39 | - | 0.47 |
| b1 | 0.38 | 0.41 | 0.43 |
| c | 0.25 | - | 0.30 |
| c1 | 0.24 | 0.25 | 0.26 |
| D | 17.90 | 18.00 | 18.10 |
| Df | 18.00 | - | 18.50 |
| E | 10.10 | 10.30 | 10.50 |
| E1 | 7.40 | 7.50 | 7.60 |
| e | 1.27BSC | | |
| L | 0.71 | 0.86 | 1.01 |
| L1 | 1.30 | 1.40 | 1.50 |
| θ | 0 | - | 8° |
| f | 0.05 | - | 0.20 |



Note:

1. All dimension are in mm.
2. Dim D & E1 does not include plastic flash;
Df includes plastic flash(f);
Flash: Plastic residual around body edge after dejunk/singulation.
3. Dim b does not include dambar protrusion/intrusion.
4. Plating thickness 0.007mm-0.020mm

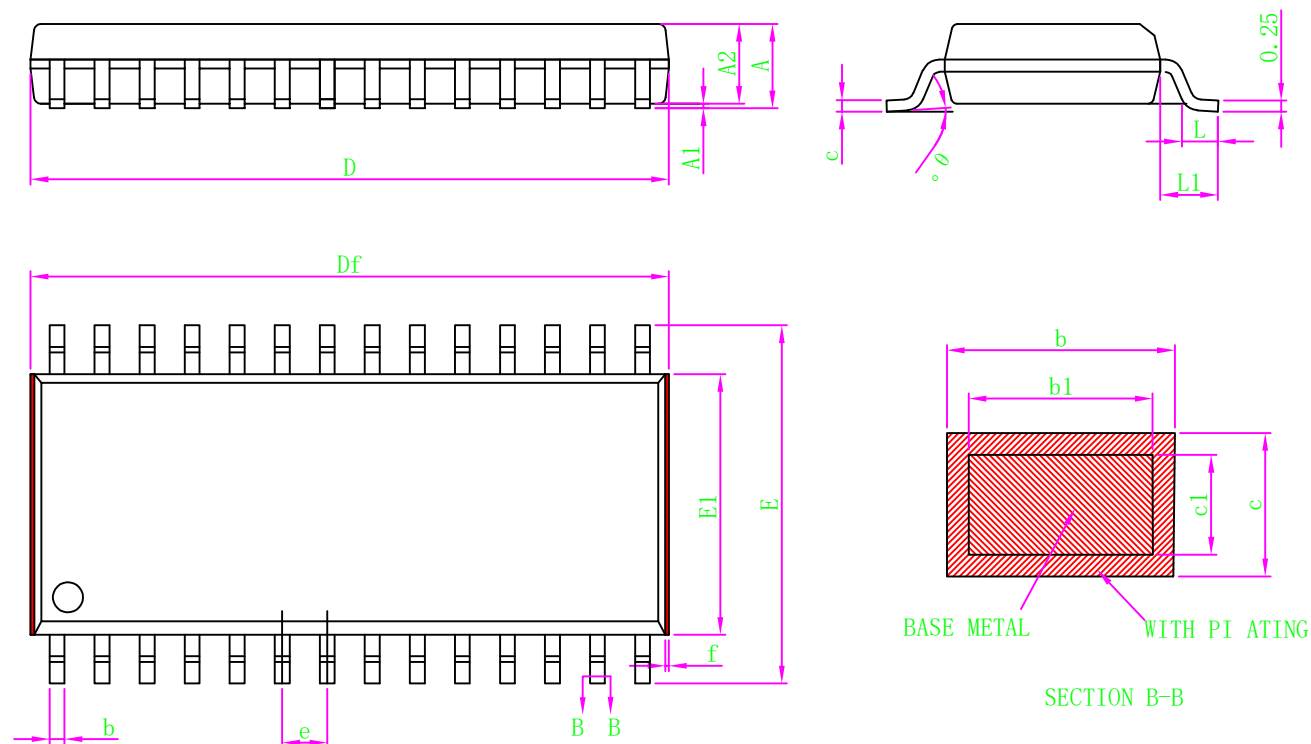

| | | | |
|---------|--|----------|--|
| 拟 制 | | 复 审 | |
| 审 核 | | 会 签 | |
| | | 标 准 化 | |
| | | 批 准 | |
| 制 图 | | 批 准 | |
| 幅 面: A4 | | 比 例: 1:1 | |

| | | | |
|--|------|----------------------|-------|
| | | | |
| | | | |
| 更改标记 | 更改内容 | 签 名 | 日 期 |
| <div><div><div></div><div></div><div></div><div></div></div><div>永嘉微电 Vinka Microelectronics</div></div> | | | |
| VKXHSOP28V11_POD 产品外形图名称 | | 图 号:VKXHSOP28V11_POD | |
| | | 单 位 | 版本 |
| | | mm | V1.1 |
| | | 第 1 张 | 共 1 张 |
| <div><div><div></div><div></div></div><div>—</div><div></div></div> | | | |