



SYMBOL	MILLIMETER		
	MIN	NOM	MAX
A	-	-	1.70
A1	0.10	0.15	0.20
A2	1.30	1.40	1.50
b	0.14	-	0.22
b1	0.13	0.16	0.19
c	0.13	-	0.17
c1	0.12	0.13	0.14
D	13.90	14.00	14.10
E	15.80	16.00	16.20
E1	13.90	14.00	14.10
eB	15.05	-	15.40
e	0.40BSC		
L	0.42	0.57	0.72
L1	0.95	1.00	1.15
θ	0	-	10°

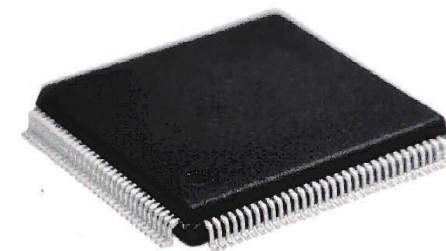

Note:

1. All dimension are in mm.
2. Dim D & E1 does not include plastic flash;  
Flash: Plastic residual around body edge after  
dejunk/singulation.
3. Dim b does not include dambar protrusion/intrusion.
4. Plating thickness 0.007mm-0.015mm

拟制		复审	
审核		会签	
制图		标准化	
幅面: A4		批准	
		比例: 1:1	

更改标记	更改内容	签名	日期
			
VKXHLQFP128V11_POD 产品外形图名称		图号: VKXHLQFP128V11_POD	
		单位	版本
		mm	V1.1
		第 1 张	共 1 张

